




Panel Types

358 Galfan - 358 Due- 358-Superior - 358 Profiled (Minimum quantity required)

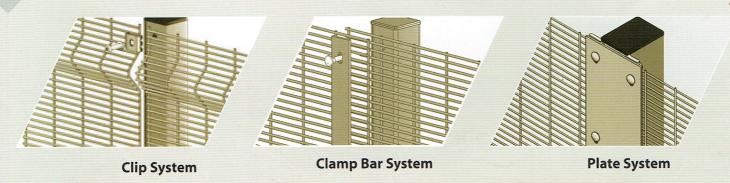

Specification:

Mesh Pattern: 76.2mm x 12.7mm each intersection Horizontal wires: 4mm wires at 76.2mm centres Vertical Wires: 4mm wires at 12.7mm centres

Top: Panels are flashed at top **Post Centre:** 2515mm approximate

Panels are produced from Galvanised wire to BS EN 10244-2:2001 class.

Panels are offered Zinc Phosphate pre-treatment and 100 micron Polyester powder coating on top of pre-galvanise wire (typically 80-100g/m² of Zinc prior to Weld) which gives long lasting protection against the weather conditions.

Standard stock colours: Green (RAL 6005) and Black (9005) There is an option of a wide range of RAL colours.

				Control of the Contro	CONTRACTOR OF THE PARTY OF THE
Fence Height	Panel (HxW)	Panel Weight (kg)	Num of Fixing	Post Dimension	Post Length
1.2m	1207x2515	27.2	4	60 x 40	1.80m
1.8m	1829x2515	41.1	5	60 x 40	2.45m
2.0m	2007x2515	45.0	5	60 x 40	2.65m
2.1m	2134x2515	47.8	6	60 x 40	2.85m
2.4m	2438x2515	54.6	6	60 x 40	3.10m
3.0m	2997x2515	67.1	8	60 x 40	3.80m

All the above panels are designed for multi lift with suitable post systems